



SPDS TYPE 2

DG S 440 FM

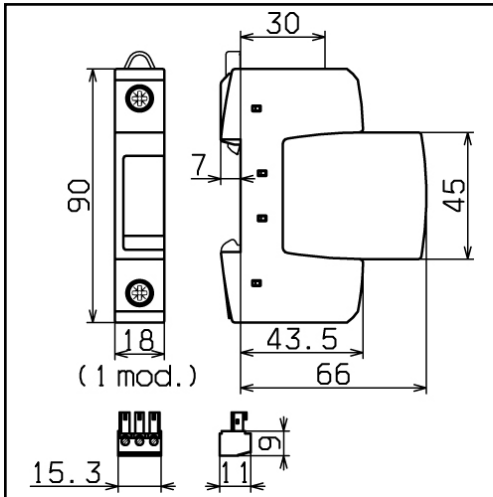

Dimension drawing DG S ... FM

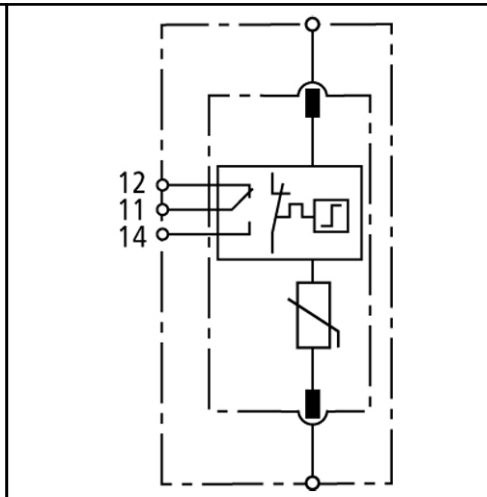

Basic circuit diagram DG S ... FM



DG S ... FM: Single-pole pluggable surge arrester consisting of a base part and plug-in protection module; with floating remote signalling contact

- High discharge capacity due to powerful zinc oxide varistor
- Quick response
- Universal surge arrester, consisting of a base element and plug-in protection component
- High reliability due to "Thermo Dynamic Control" SPD controlling device
- Energy-coordinated within the Red/Line product family
- Operating state/fault indication by mark in the inspection window, with floating remote signalling contact
- Small (modular) design according to DIN 43880
- Multifunctional terminals for connection of conductors and busbars
- Easy replacing of protection modules with releasing button

DG S 440 FM

SPD according to EN 61643-11	Type 2
SPD according to IEC 61643-1	Class II
Max. continuous ac voltage [U _C]	440 V
Max. continuous dc voltage [U _C]	585 V
Nominal discharge current (8/20 μs) [I _n]	20 kA
Max. discharge current (8/20 μs) [I _{max}]	40 kA
Voltage protection level [U _p]	≤ 2 kV
Voltage protection level at 5 kA [U _p]	≤ 1.7 kV
Response time [t _A]	≤ 25 ns
Max. mains-side overcurrent protection	125 A gL/gG
Short circuit withstand capability at max. mains-side overcurrent protection	25 kA _{rms}
TOV voltage [U _T]	580 V / 5 sec.
Operating temperature range [T _U]	-40°C...+80°C
Cross-sectional area (min.)	1.5 mm ² solid/flexible
Cross-sectional area (max.)	35 mm ² stranded/25 mm ² flexible
Mounting on	35 mm DIN rail acc. to EN 60715
Enclosure material	red thermoplastic, UL 94 V-0
Degree of protection	IP 20
Dimension	1 mod., DIN 43
Approvals, Certifications	KEMA, VDE
Type of remote signalling contact	changeover contact
Switching capacity ac	250 V/0.5 A

Switching capacity dc	250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm ² solid/flexible
Ordering information	
Type	DG S 440 FM
Part No.	952 095
Packing unit	1 pcs.

Change in form and technology, with masses, weights and materials we reserve ourselves in the sense of the progress of the technology. The illustrations are noncommittal.