

DET10C, DET20C

Earth/Ground Resistance Clamp Testers



- Easy, fast clamp-on operation – No rods or cables necessary
- Measures ground resistance from 0.025Ω to 1550Ω
- Measures ground leakage current from 0.2mA to 35A
- Auto ranging with high and low alarms
- Automatic self calibration
- Extensive data storage and RS232 data download for later analysis (DET20C)

DESCRIPTION

The Megger models DET10C and 20C measure earth/ground resistance and current flow using clamp-on technology. The instruments induce a test current into the system without the need to disturb existing connections. Either unit is a useful addition to the more traditional methods of earth/ground resistance testing that may require disconnection and the use of stakes or ground rods. Simply clamp around the conductor or stake/rod and measure the resistance to ground fast and accurately.

The DET10C and 20C can also be used to measure earth/ground resistance in multiple loop installations without disconnecting the earth or ground. This allows the user to perform the test quickly and easily in total safety, with the added convenience of having a single point of measurement to read the earth/ground resistance.

Each instrument also provides a true RMS current measurement reading to better indicate potential measurement problems and provide a useful overview of the dynamics of the general earth/ground system.

The units are rugged, compact and have configurable audible alarms. They also feature auto shutdown (which is also configurable), data storage and self calibration on power-up, and are supplied with a calibration loop – all contained in a rugged carry case. The DET20C also comes with a RS232 interface cable and is compatible with Megger Download Manager Software (included) allowing further analysis and storage of data.

APPLICATION

The DET10C and 20C have a variety of applications including:

- Use to measure resistance and continuity of grounding loops around pads and buildings.
- Use on multi-grounded systems without disconnecting the ground rod/stake under test.
- Use to measure leakage current flowing to ground or circulating in ground systems.
- Use on cell towers, RF transmitters and telecommunications sites.
- Use to inspect and verify lightning protection systems.
- Use on a variety of consumer installations, including pools, spas, etc.

FEATURES AND BENEFITS

- Easy and fast clamp-on operation. No need for cables or auxiliary rods/stakes.
- Large LCD display screen that can be read in bright sunlight.
- Measures ground resistance from 0.025Ω to 1550Ω.
- Direct reading of continuity and ground loop resistance.
- Measures ground leakage or phase current from 0.2mA to 25A.
- Large jaw opening to accommodate a variety of conductors.
- Indication of high noise content that may affect readings.
- Lightweight...only 750g (1.65lbs), yet exceptionally rugged for regular field use.
- Hold function for difficult to reach installations.
- Auto-off to save on battery power.
- Configure high and low alarms with audible indication for fast field checks.
- On board storage of test results (up to 8180 records).
- Calibration check loop to insure proper operation.
- Rugged, yet lightweight storage case contains complete testing kit.
- RS-232 interface for download of test data for later analysis (DET20C).



The DET20C instrument is shown being used to test a pole ground.

ELECTRICAL SPECIFICATIONS

Ground Resistance Range ²	Resolution	Accuracy ¹
0.025 - 0.25 Ω	0.002 Ω	± 1.5% ± 0.05 Ω
0.25 - 9.999 Ω	0.02 Ω	± 1.5% ± 0.1 Ω
10 - 99.99 Ω	0.04 Ω	± 2.0% ± 0.3 Ω
100 - 199.9 Ω	0.4 Ω	± 3.0% ± 1.0 Ω
200 - 400 Ω	2 Ω	± 5.0% ± 5
400 - 600 Ω	5 Ω	± 10% ± 10 Ω
600 - 1550 Ω	20 Ω	± 20%

¹ Loop resistance non-inductive, external field <50 A/m, external electrical field <1 V/m, conductor centred in jaws.
² Resistance measurement frequency 1.667KHz

Alarm Type	Range	Resolution
High Alarm	0 - 1550 Ω	1 Ω
Low Alarm	0 - 1550 Ω	1 Ω

Leakage Current Range ³	Resolution	Accuracy
0.200 - 1.000 mA	0.001 mA	± 2.0% ± 0.05 mA
1.00 - 10.00 mA	0.01 mA	± 2.0% ± 0.03 mA
10.0 - 100.0 mA	0.1 mA	± 2.0% ± 0.3 mA
100 - 1000 mA	1 mA	± 2.0% ± 3 mA
0.20 - 35 A	0.01 A	± 2.0% ± 0.03 A

³ Auto range, 50/60Hz, true RMS to crest factor <3.5

GENERAL SPECIFICATION

- Conductor size35mm Ø approx
- Battery type9V IEC 6 LR61 alkaline
- Display type4 digits 9999 counts LCD
- Range selectionAutomatic within function
- Overload indicationOL
- Power consumption.....40 mA
- Battery life3000 measurements approx
- Auto power down5 minutes approx
- Sampling time0.5 seconds
- Operating temperature0 to 50° C
- Storage temperature.....-20° C to 60° C
- Operating humidityLess than 85% RH
- Storage humidityLess than 75% RH
- Dimensions.....276 L X 100 W X 47 H (mm)
- Weight.....750g (1.65lbs)
- Data logging capacity DET10C.....116 records
- Data logging capacity DET20C.....8180 records

Safety

- EN61010-2-032
- CATIII 300 V, CATII 600 V
- Pollution degree 2

DET20C OPERATION

Jaw Assembly

Extra large opening – 35 mm (1.36 in) to encircle electrode or ground rod. No air is allowed between the two jaw halves.

Jaw Trigger Lever

FUNC Button

Used to select the following functions:

- HI:** high alarm level in ohms
- LO:** low alarm level in ohms
- SEC:** sampling interval (in seconds)
- dI:** download stored data to a PC
- NO:** allows scrolling through stored readings
- 232:** enables the RS232C output capability



HOLD Button

Maintains last measurement on the LCD display

Selector Switch

- Quickly and easily select
- Leakage current (amps)
 - Leakage current (milliamps)
 - High/Low Alarm
 - Ground resistance (ohms)


LCD Panel

REC Button

Used to increment value or start data download when the FUNC button is in use. Also used to start data logging or record a reading.

DET20C DISPLAY EXAMPLE

- 1. Function** Display current selected function or current record number.
- 2. Digits** Display value from 0 to 9999 with decimal point.
- 3. Ohm** Indicates resistance mode and alarm functions.
- 4. mA** Indicates ground leakage current mode in mA or A.
- 5. >>>** Indicates instrument is set at the alarm position.
- 6. NOISE:** Indicates ground resistance tester senses noise or excessive current present in the ground electrode.
- 7. Jaw Open** Displayed if the jaws are opened during the measurement, this symbol and word OPEN will be shown in LCD.
- 8. Low Battery** Indicates battery voltage is lower than required.
- 9. NO.** Indicates the data record number in memory.
- 10. REC** Indicates data logging is in progress.
- 11. H** Indicates "HOLD" function activated.
- 12. AP** Indicates Auto Power Off activated. Deactivate by holding down the REC button then turning on unit.

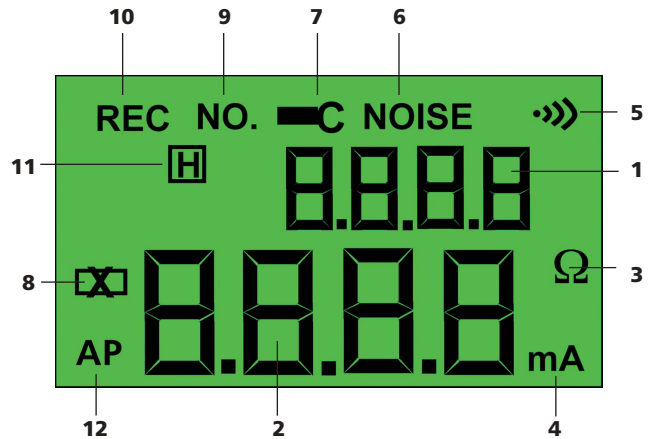

DET20C Data Functions

- Store a specific reading
- Data logging
 - Adjustable sampling interval
 - Data logging capacity up to 8180 records (DET20C)
- Review of stored data
- Download data to a PC for later analysis



The DET20C instrument is shown being used to test a facility ground.



DET10C and 20C comes with a rugged carry case, calibration fixture, carry case shoulder strap and RS-232 cable (DET20C only).

ORDERING INFORMATION	
Item (Qty)	Cat. No.
Digital Earth Test Clampmeter	DET10C
Digital Earth Test Clampmeter	DET20C
Included Accessories (DET10C and DET20C)	
Carry case	
Calibration loop	
Battery (fitted)	
Included Accessories (DET 20C)	
RS 232 interface unit	
Download Manager Software	

UK
Archcliffe Road, Dover
CT17 9EN England
T (0) 1 304 502101
F (0) 1 304 207342

UNITED STATES
4271 Bronze Way
Dallas, TX 75237-1019 USA
T 1 800 723 2861
T 1 214 333 3201
F 1 214 331 7399

OTHER TECHNICAL SALES OFFICES
Norristown USA, Toronto CANADA,
Mumbai INDIA,
Le Raincy FRANCE, Cherrybrook
AUSTRALIA, Guadalajara SPAIN
and The Kingdom of BAHRAIN.

ISO STATEMENT
Registered to ISO 9001:1994 Reg no. Q 09250
Registered to ISO 14001 Reg no. EMS 61597

DET20C_10C_DS_en_V04
www.megger.com
Megger is a registered trademark