

## Earthing and Short-circuiting Device

### Kit for street lighting installations


- For junction and fuse boxes of street lighting installations
- For E14 fuse links
- Aluminium adapter for converting from E27 to E14 threads
- Max. backup fuse 32 A power circuit breaker (B characteristic)

## SAFETY EQUIPMENT

### EQUIPMENT FOR VOLTAGES UP TO 1000 V



Earthing and short-circuiting device installed at a junction and fuse box of a street lighting mast.

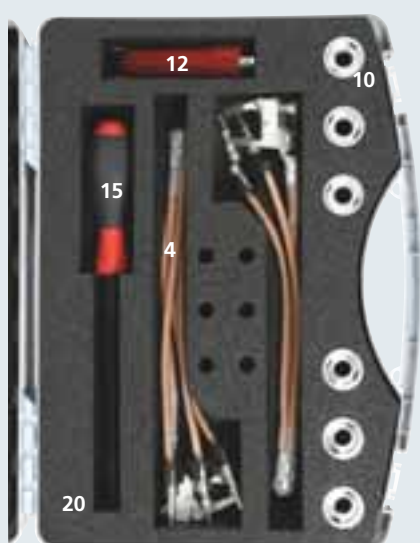

Type	Dimensions	Part No.	
<b>A Kit for Street Lighting Installations in a Plastic Case</b>			
Standard kit includes:			
Pos.	Qty.	Description	Part No.
4	2	Standard earthing and short-circuiting device, E14 screw-in earthing insert, 6 mm <sup>2</sup>	745 107
10	6	E27 / E14 adapter	745 108
12	1	Installation adapter	745 109
15	1	Adjustable handle with flexible shaft	745 921
20	1	Plastic case	745 106
EKV ÜGK MB S		395 x 295 x 105 mm	<b>745 105</b>

Customised kits are available on request.

## SAFETY EQUIPMENT


### EQUIPMENT FOR VOLTAGES UP TO 1000 V

## Single Parts of Earthing and Short-circuiting Devices

### Earthing and Short-circuiting Device for Street Lighting Installations

With 3 fixed E14 earthing screw inserts and spring-loaded earth clamp, clamping range up to 24 mm (installation with adjustable handle, Part No. 745 921)

Type	Cable cross section	Position	Part No.
EKV ÜGK MB	6 mm <sup>2</sup>	4	745 107

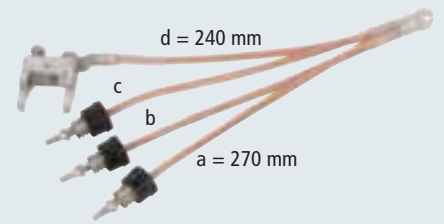

### E27 / E14 Adapter

Reducing insert for converting from E27 to E14 threads

Allows for use of the earthing and short-circuiting device with E14 earthing screw inserts, even for E27 threads

Type	Dimensions	Material	Position	Part No.
RED E27 E14 ÜGK MB	Ø30 x 25 mm	Al	10	745 108



### Installation Adapter

For installing the E27/E14 adapter and D-gauges DII and DIII

Type	Dimensions	Material	Position	Part No.
PSS DII	Ø30 x 110 mm	plastic	12	745 109



### Adjustable Handle with flexible Shaft

With magnetic socket wrench insert

For connecting the spring-loaded earth clamp

Type	Length	Position	Part No.
DGF EKV VI	270 mm	15	745 921



### Plastic Case, empty

With foam padding

Type	Colour	Dimensions	Position	Part No.
KKL EKV ÜGK MB	●	395 x 295 x 105 mm	20	745 106

